


Product Detail

FLANGE WALL PADDING



14 oz Vinyl Colors: (Actual Colors May Vary)

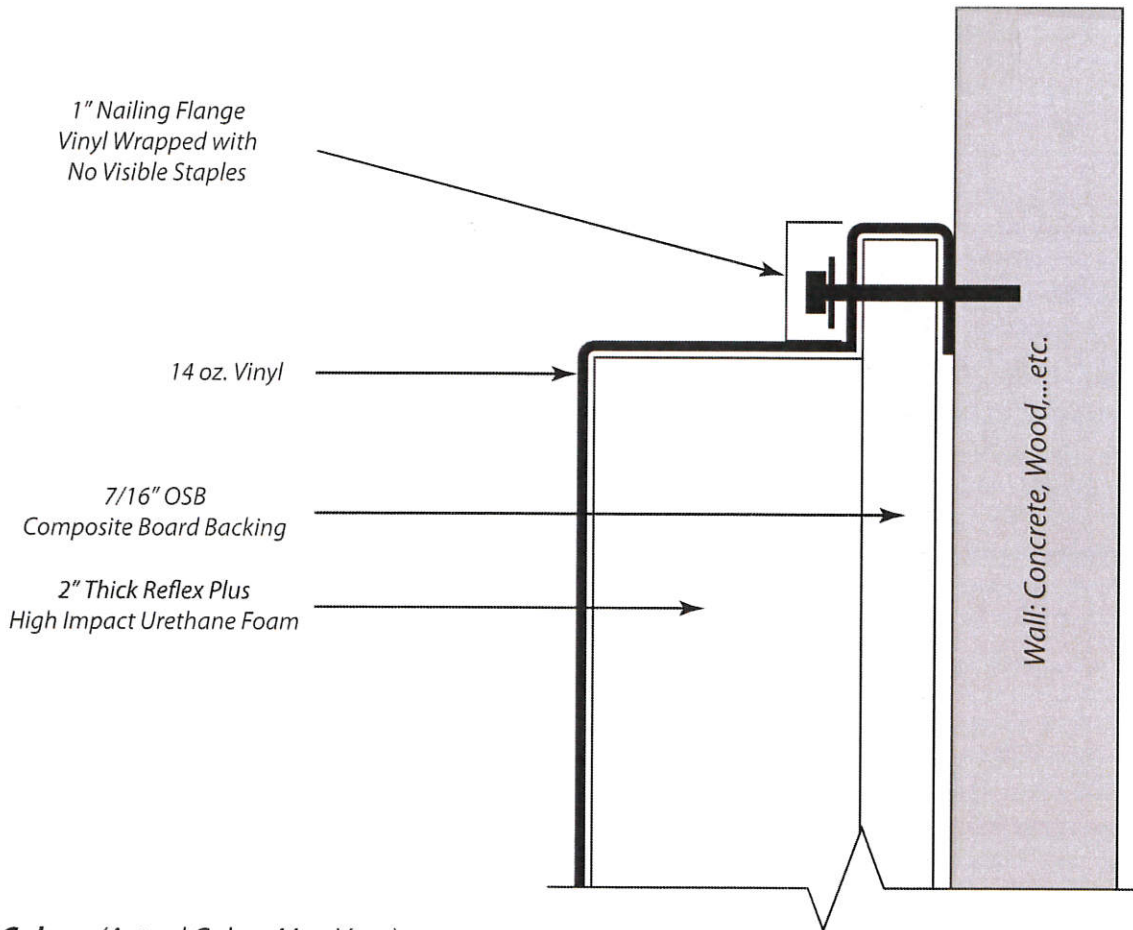

SPECIFICATIONS:

Interior Use

Wall padding shall be constructed of 7/16" OSB oriented strand board with 2" thick 80# poly urethane open cell foam conforming to 16CFR1632 combustibility requirements bonded together with non flammable adhesive. Padding shall be covered with 14 oz. flame resistant vinyl coated fabric. Vinyl fabric shall be attached to the OSB with staples that shall not be visible from the front of the pad.

Standard padding sizes are 2' (w) x 6' (h), 2' (w) x 7' (h), 2' (w) x 8' (h), 4' (w) x 6' (h), 4' (w) x 7' (h) and 4' (w) x 8' (h), but can be produced in custom sizes and shapes.

Not To Scale

Model Numbers:

2' x 6': **WP62F**(26#) 2' x 7': **WP72F**(31#) 2' x 8': **WP82F**(36#) 4' x 6': **WP64F**(52#) 4' x 7': **WP74F**(62#) 4' x 8': **WP84F**(72#)
16' x 6'(2' Wide Panels): **WP6216F**(208#) 16' x 7'(2' Wide Panels): **WP7216F**(248#) 16' x 8'(2' Wide Panels): **WP8216F**(288#)
16' x 6'(4' Wide Panels): **WP6416F**(208#) 16' x 7'(4' Wide Panels): **WP7416F**(248#) 16' x 8'(4' Wide Panels): **WP8416F**(288#)